



POWER LEG MUST BE "C" PHASE IN METER SOCKET FOR CORRECT METER REGISTRATION

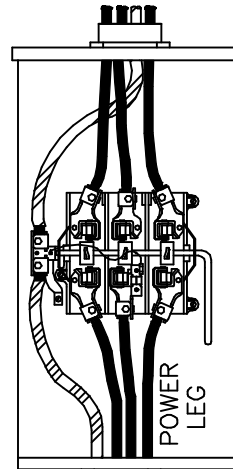

POWER LEG MUST BE IN FAR RIGHT POSITION

POWER LEG MUST BE "B" PHASE IN CUSTOMER'S SWITCHBOARD OR PANELBOARD TO COMPLY WITH SECTION 384-3(F) OF THE NATIONAL ELECTRICAL CODE.

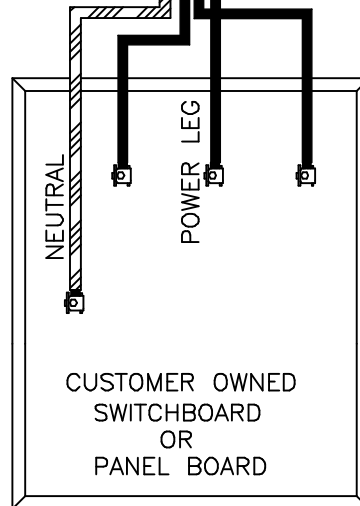

Mississippi Power 
the southern electric system

DISTRIBUTION SPECIFICATIONS ©

SUBJECT POWER LEG CONNECTION - 3 PHASE, 4 WIRE DELTA

DETAIL _____

Date 10/13/95

Plate 71

File MS0079